


Gas-cooled guns

LG 260 G

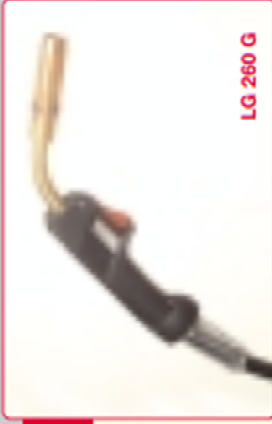

LG 260 G

LG 260 G

LG260 G 3M K10413-26-3M
 LG260 G 4M K10413-26-4M
 LG260 G 5M K10413-26-5M

Application*

	Ø	Short Arc STT®	Spray Arc	Pulse
Steel Solid (80%Ar/20%CO ₂)	0,8	■	■	■
	1,0	■	▲	▲
	1,2	■		
Stainless (98%Ar2%CO ₂)	0,8	■	■	■
	1,0	■	▲	▲
	1,2	■		
Aluminum (100% Ar)	1,0		▲	▲
	1,2			▲
	1,6			

Technical data

Mix gas (M21)	100% CO2
260A 60%	290A 60%
0.8-1.2mm	
Gas	min 12l/min
Duty Cycle (10min 40C°)	
Wire range	
Cooling	

Gas nozzles



Description	item	Ø	pack
Conical	KP10461-5	16 mm	
Extra conical	KP10461-10	14 mm	
Cylindrical	KP10460-5	20 mm	10pcs
Spot weld	KP10463-5	20 mm	

Parts

	Tip Holder M6	
	KP10455-3	10 pcs/pack
	Gas diffuser	
	KP10406-WT	10 pcs/pack